

# 2RI100E(2x100A)

600V,800V / 100A

2 in one-package

## ■ Features


- Glass Passivation Chip
- Easy Connection
- Insulated Type

## ■ Applications


- Inverters
- Battery Chargers
- DC Motors
- General Purpose DC Power Supplies

## POWER DIODE MODULE

### Outline Drawings, mm

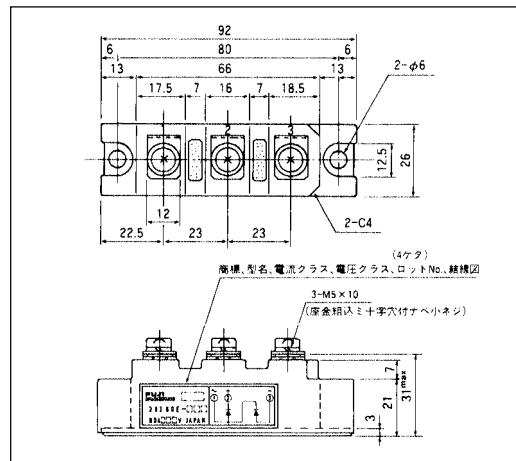

### ■ Inner Circuit Schematic

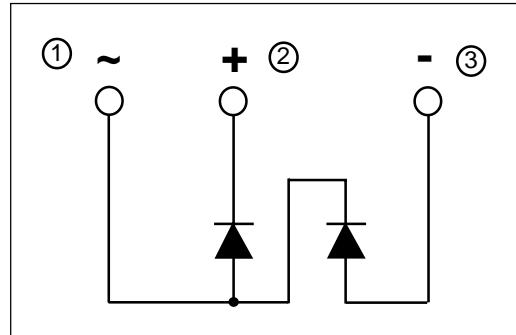

## ■ Maximum ratings and characteristics

### ● Absolute maximum ratings

Item	Symbol	Conditions	Rating		Unit
			-060	-080	
Repetitive peak reverse voltage	$V_{RRM}$		600	800	V
Non-repetitive peak reverse voltage	$V_{RSM}$		660	880	V
Average output current	$I_o$	50/60Hz Sine wave, $T_c=103^{\circ}\text{C}$	2 x 100		A
Surge current	$I_{FSM}$	From rated load, Sine wave 10ms	2000		A
$I^2t$	$I^2t$	From rated load	16000		$\text{A}^2\text{s}$
Operating junction temperature	$T_j$		-40 to +150		$^{\circ}\text{C}$
Storage temperature	$T_{stg}$		-40 to +125		$^{\circ}\text{C}$
Isolation voltage	$V_{is}$		AC2000(1min.)		V
Screw torque			3.5	*1	N·m

\*1: Recommendable value : 2.5 to 3.0 N·m(M5)

### ● Electrical characteristics (Ta=25°C Unless otherwise specified )

Item	Symbol	Conditions	Min.	Typ.	Max.	Unit
Forward voltage drop	$V_{FM}$	$T_j=25^{\circ}\text{C}$ , $I_{FM}=320\text{A}$			1.30	V
Reverse current	$I_{RRM}$	$T_j=150^{\circ}\text{C}$ , $V_R=V_{RRM}$			20	mA


### ● Thermal Characteristics

Item	Symbol	Conditions	Min.	Typ.	Max.	Unit
Thermal resistance	$R_{th(j-c)}$	Junction to case			0.2	$^{\circ}\text{C}/\text{W}$
	$R_{th(c-f)}$	the base to cooling fin *			0.10	$^{\circ}\text{C}/\text{W}$


\* : With Thermal Compound

## ■ Characteristics


**Forward Characteristics**

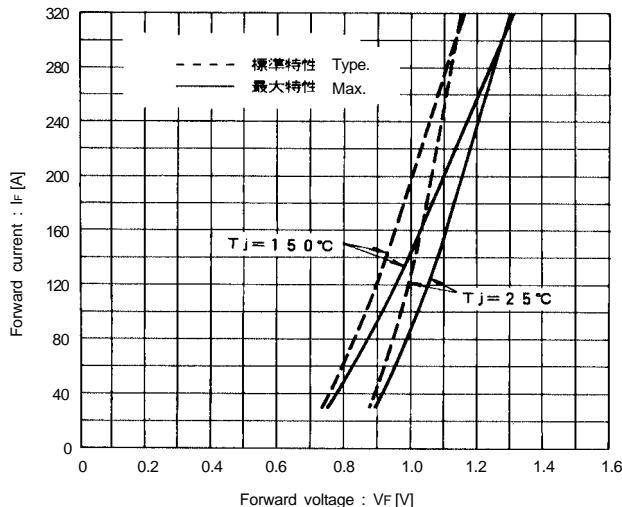


**Forward Average Current vs. Power Loss**

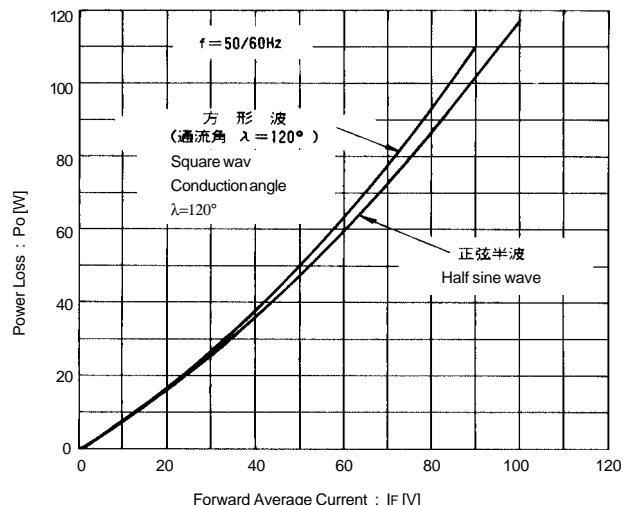

**Forward Average Current vs. Case Temperature**

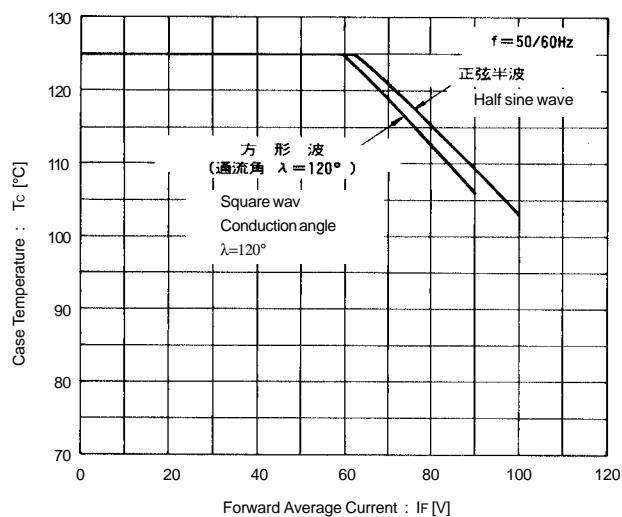

**Surge Current**

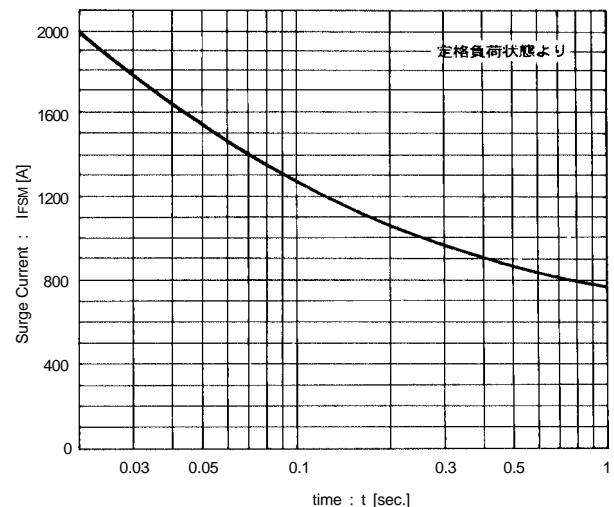

**Transient Thermal Impedance**

