

# 2SB951, 2SB951A

Silicon PNP epitaxial planar type Darlington

For midium-speed switching


Complementary to 2SD1277 and 2SD1277A

## Features


- High foward current transfer ratio  $h_{FE}$
- High-speed switching
- Full-pack package which can be installed to the heat sink with one screw

## Absolute Maximum Ratings ( $T_C=25^\circ\text{C}$ )

Parameter	Symbol	Rated	Unit
Collector to base voltage	$V_{CBO}$	-60	V
2SB951A		-80	
Collector to emitter voltage	$V_{CEO}$	-60	V
2SB951A		-80	
Emitter to base voltage	$V_{EBO}$	-7	V
Peak collector current	$I_{CP}$	-12	A
Collector current	$I_C$	-8	A
Collector power dissipation	$P_C$	45	W
$T_C=25^\circ\text{C}$ $T_a=25^\circ\text{C}$		2	
Junction temperature	$T_j$	150	$^\circ\text{C}$
Storage temperature	$T_{stg}$	-55 to +150	$^\circ\text{C}$

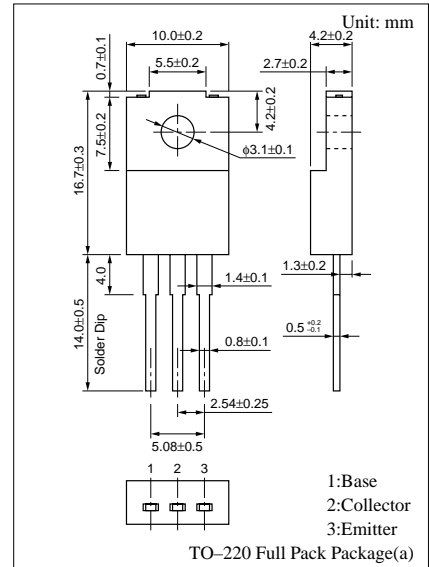

## Internal Connection

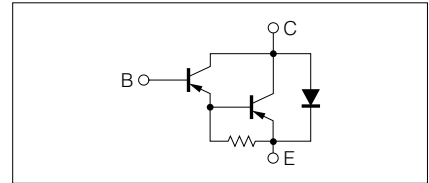

## Electrical Characteristics ( $T_C=25^\circ\text{C}$ )

Parameter	Symbol	Conditions	min	typ	max	Unit	
Collector cutoff current	$I_{CBO}$	$V_{CB} = -60\text{V}, I_E = 0$			-100	$\mu\text{A}$	
2SB951A		$V_{CB} = -80\text{V}, I_E = 0$			-100		
Emitter cutoff current	$I_{EBO}$	$V_{EB} = -7\text{V}, I_C = 0$			-2	mA	
Collector to emitter voltage	$V_{CEO}$	$I_C = -30\text{mA}, I_B = 0$	-60			V	
2SB951A			-80				
Forward current transfer ratio	$h_{FE1}^*$	$V_{CE} = -3\text{V}, I_C = -4\text{A}$	2000		10000		
		$V_{CE} = -3\text{V}, I_C = -8\text{A}$	500				
Collector to emitter saturation voltage	$V_{CE(sat)}$	$I_C = -4\text{A}, I_B = -8\text{mA}$			-1.5	V	
Base to emitter saturation voltage	$V_{BE(sat)}$	$I_C = -4\text{A}, I_B = -8\text{mA}$			-2	V	
Transition frequency	$f_T$	$V_{CE} = -10\text{V}, I_C = -1\text{A}, f = 1\text{MHz}$		20		MHz	
Turn-on time	$t_{on}$	$I_C = -4\text{A}, I_{B1} = -8\text{mA}, I_{B2} = 8\text{mA}, V_{CC} = -50\text{V}$		0.5		$\mu\text{s}$	
Storage time	$t_{stg}$				2		$\mu\text{s}$
Fall time	$t_f$				1		$\mu\text{s}$

\* $h_{FE1}$  Rank classification

Rank	Q	P
$h_{FE1}$	2000 to 5000	4000 to 10000

