


金属化聚丙烯膜交流电动机电容器

Metallized Polypropylene Film AC Motor Capacitor

Type: **CBB60**

■ 外形图 Outline Drawing

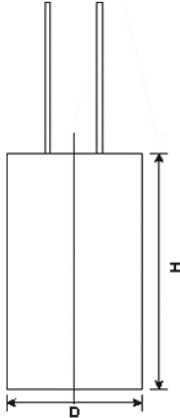

■ 特点

- 金属化聚丙烯膜卷绕，无感式结构
- 铝壳，环氧树脂灌封，阻燃性符合 UL94V-0
- 损耗小，温度特性好，绝缘电阻高
- 自愈性好，寿命长，可靠性高
- 适用于洗衣机、分马力电机、冰箱等单相电动机的启动和运转


■ Features

- Metallized polypropylene film dielectric, non-inductive type
- Aluminium case, epoxy resin filled, box material is flame retardant according to UL94V-0
- Loss loss, excellent temperature characteristics and high insulation resistance
- Excellent self-healing properties, long life and high reliability
- Suitable for starting and running of single-phase motors used in air-conditioners, washing-machines, divided motors and refrigerators etc.

■ 技术要求 Specifications

引用标准 Reference Standard	GB 3667-1997 (IEC60252-1)
额定电压 Rated Voltage	450Vac
额定温度 Rated temperature	+70°C
工作温度范围 Operating Temperature Range	-40°C~+70°C
容量范围 Capacitance Range	6μF~50μF
容量偏差 Capacitance Tolerance	±5% (J); ±10% (K)
损耗角正切 Dissipation Factor	≤0.0005 (20°C, 100Hz)
绝缘电阻 Insulation Resistance	T-T: 3000MΩ (20°C, 1min) T-C: 1000 MΩ
耐电压 Voltage Proof	T-T: 1.75U _R (10s) T-C: 2000VAC (60s)

■ 安全认证 Safety Approval

认证标志 Certification Mark	引用标准 Reference Standard	范围 Range	证书号 File No.
	GB 3667-1997	450Vac, 6 μ F ~ 50 μ F	2002CAP0106CQC

■ 外形尺寸 Dimensions (mm)

标称容量 Rated Cap. μ F	450Vac	
	D _{max}	H _{max}
6	30	55
8	35	55
10	40	55
12	35	68
14	40	68
16	40	68
18	40	68
20	40	90
30	45	90
40	40	110
50	45	110

** 以上尺寸仅供参考，实际尺寸以规格承认书为准。

** The above dimensions are only for reference. The final dimensions are subject to our specifications.