

High Power Lugged Type IGBT Module

Description

DAWIN'S IGBT 7DM-2 Package devices are optimized to reduce losses and switching noise in high frequency power conditioning electrical systems. These IGBT modules are ideally suited for power inverters, motors drives and other applications where switching losses are significant portion of the total losses.


Features

- ☞ High Speed Switching
- ☞ $BV_{CES} = 600V$
- ☞ Low Conduction Loss : $V_{CE(sat)} = 2.1V$ (typ.)
- ☞ Fast & Soft Anti-Parallel FWD
- ☞ Short circuit rated : Min. 10uS at $T_C = 100^\circ C$
- ☞ Reduced EMI and RFI
- ☞ Isolation Type Package

Applications

Motor Drives, High Power Inverters, Welding Machine, Induction Heating, UPS , CVCF, Robotics , Servo Controls, High Speed SMPS

Equivalent Circuit and Package

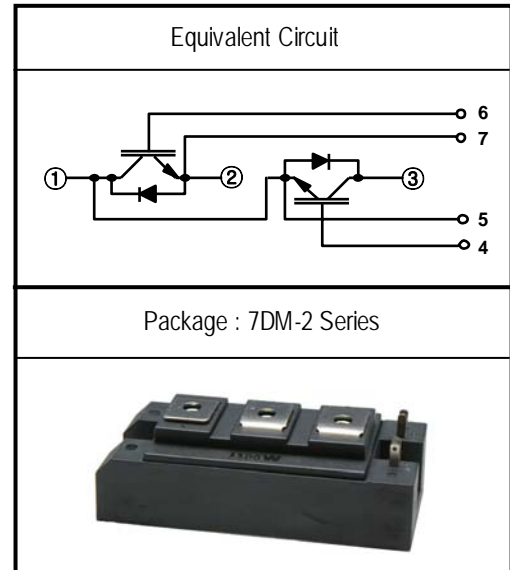

Please see the package out line information

Absolute Maximum Ratings @ $T_j = 25^\circ C$ (Per Leg)

Symbol	Parameter	Conditions	Ratings	Unit
V_{CES}	Collector-Emitter Voltage	-	600	V
V_{GES}	Gate-Emitter Voltage	-	± 20	V
I_C	Collector Current	$T_c = 25^\circ C$	250	A
		$T_c = 80^\circ C$	200	A
$I_{CM(1)}$	Pulsed Collector Current	-	400	A
I_F	Diode Continuous Forward Current	$T_c = 80^\circ C$	200	A
I_{FM}	Diode Maximum Forward Current	-	400	A
T_{SC}	Short Circuit Withstand Time	$T_c = 100^\circ C$	10	uS
P_D	Maximum Power Dissipation	$T_c = 25^\circ C$	695	W
T_j	Operating Junction Temperature	-	-40 ~ 150	$^\circ C$
T_{stg}	Storage Temperature Range	-	-40 ~ 125	$^\circ C$
V_{iso}	Isolation Voltage	AC 1 minute	2500	V
TL	Maximum Lead Temp. for soldering Purposes, 1/8" from case for 9 seconds	-	260	$^\circ C$
	Mounting screw Torque :M6	-	4.0	N.m
	Power terminals screw Torque :M5	-	2.0	N.m

Electrical Characteristics of IGBT @ $T_C=25^\circ\text{C}$ (unless otherwise specified)

Symbol	Parameter	Conditions	Values			Unit
			Min.	Typ.	Max.	
BV_{CES}	C - E Breakdown Voltage	$V_{GE} = 0V, I_C = 250\mu A$	600	-	-	V
$\Delta BV_{CES}/\Delta T_J$	Temperature Coeff. of Breakdown Voltage	$V_{GE} = 0V, I_C = 1.0mA$	-	0.6	-	$V/^\circ\text{C}$
$V_{GE(th)}$	G - E threshold voltage	$I_C = 200mA, V_{CE} = V_{GE}$	5.0	6.5	8.5	V
I_{CES}	Collector cutoff Current	$V_{GE} = V_{GES}, V_{CE} = 0V$	-	-	250	μA
I_{GES}	G - E leakage Current	$V_{GE} = V_{GES}, V_{CE} = 0V$	-	-	± 100	nA
$V_{CE(sat)}$	Collector to Emitter saturation voltage	$I_C = 200A, V_{GE} = 15V @ T_C = 25^\circ\text{C}$	-	2.1	2.9	V
		$I_C = 200A, V_{GE} = 15V @ T_C = 100^\circ\text{C}$	-	2.4	-	V
$t_{d(on)}$	Turn on delay time	$V_{CC} = 300V, I_C = 200A$ $V_{GE} = \pm 15V$ $R_G = 2\Omega$ Inductive Load, @TC = 25 °C	-	110	-	nS
t_r	Turn on rise time		-	90	-	nS
$t_{d(off)}$	Turn off delay time		-	140	-	nS
t_f	Turn off fall time		-	145	250	nS
E_{on}	Turn on Switching Loss		-	2.9	-	mJ
E_{off}	Turn off Switching Loss		-	6.5	-	mJ
E_{ts}	Total Switching Loss		-	9.4	-	mJ
T_{sc}	Short Circuit Withstand Time	$V_{CC} = 300V, V_{GE} = \pm 15V$ @ $T_C = 100^\circ\text{C}$	10	-	-	μS
Q_g	Total Gate Charge	$V_{CC} = 300V$	-	625	-	nC
Q_{ge}	Gate-Emitter Charge	$V_{GE} = \pm 15V$	-	150	-	nC
Q_{gc}	Gate-Collector Charge	$I_C = 200A$	-	215	-	nC

Electrical Characteristics of FRD @ $T_c=25^\circ\text{C}$ (unless otherwise specified)

Symbol	Parameter	Conditions	Values			Unit	
			Min.	Typ.	Max.		
V_{FM}	Diode Forward Voltage	$I_F=200\text{A}$	$T_c = 25^\circ\text{C}$	-	1.7	2.2	V
			$T_c = 100^\circ\text{C}$	-	1.8	-	
t_{rr}	Diode Reverse	$I_F=200\text{A}, V_R=300\text{V}$ $di/dt = -200\text{A}/\mu\text{S}$	$T_c = 25^\circ\text{C}$	-	120	140	nS
	Recovery Time		$T_c = 100^\circ\text{C}$	-	140	-	
I_{rr}	Diode Peak Reverse		$T_c = 25^\circ\text{C}$	-	40	45	A
	Recovery Current		$T_c = 100^\circ\text{C}$	-	47	-	
Q_{rr}	Diode Reverse		$T_c = 25^\circ\text{C}$	-	2400	3150	nC
	Recovery Charge		$T_c = 100^\circ\text{C}$	-	3290	-	

Thermal Characteristics and Weight

Symbol	Parameter	Conditions	Values			Unit
			Min.	Typ.	Max.	
$R_{\theta JC}$	Junction-to-Case(IGBT Part, Per 1/2 Module)		-	-	0.18	$^\circ\text{C}/\text{W}$
$R_{\theta JC}$	Junction-to-Case(DIODE Part, Per 1/2 Module)		-	-	0.37	$^\circ\text{C}/\text{W}$
$R_{\theta CS}$	Case-to-Sink (Conductive grease applied)		0.04	-	-	$^\circ\text{C}/\text{W}$
Weight	Weight of Module		-	-	250	g

Performance Curves

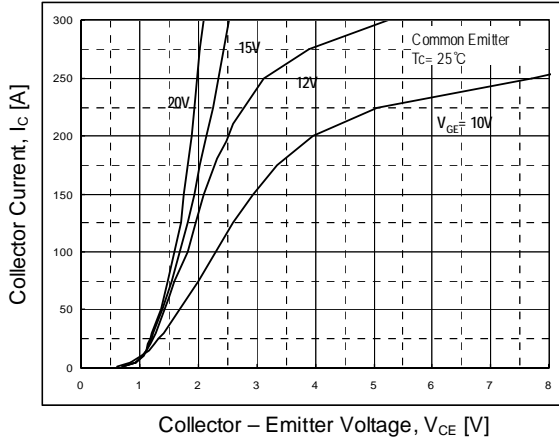


Fig 1. Typical Output characteristics

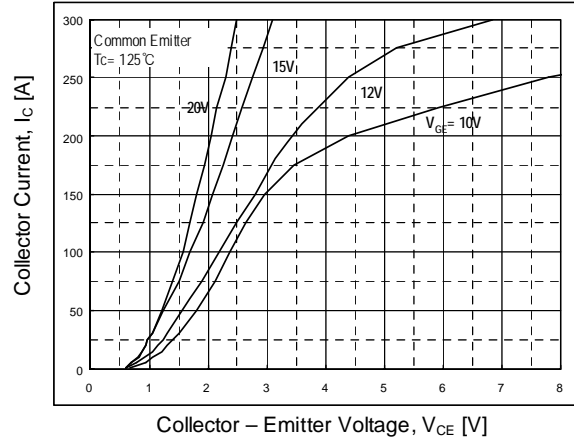


Fig 2. Typical Output characteristics

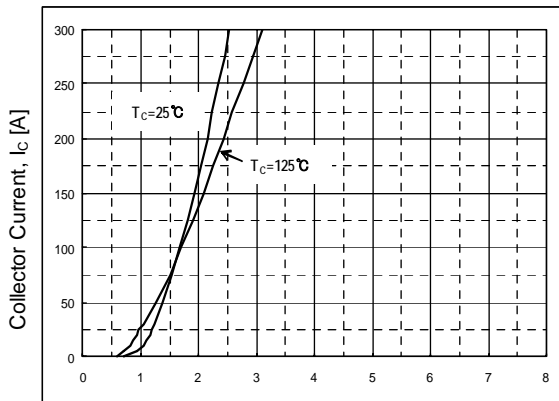


Fig 3. Typical Saturation Voltage characteristics

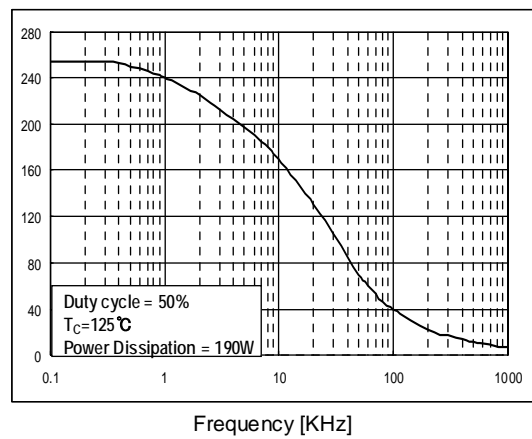


Fig 4. Load Current vs. Frequency

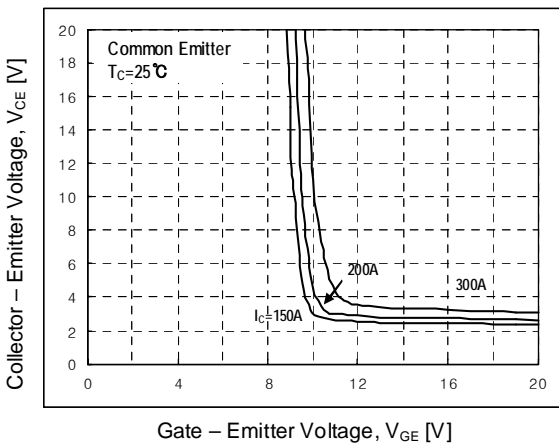


Fig 5. Typical Saturation Voltage vs. Vge

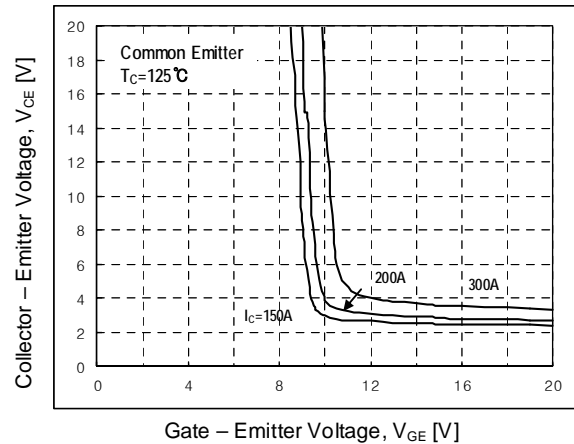


Fig 6. Typical Saturation Voltage vs. Vge

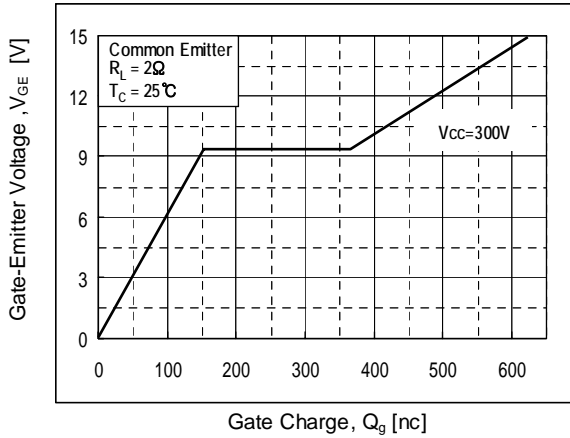


Fig 7. Gate Charge Characteristics

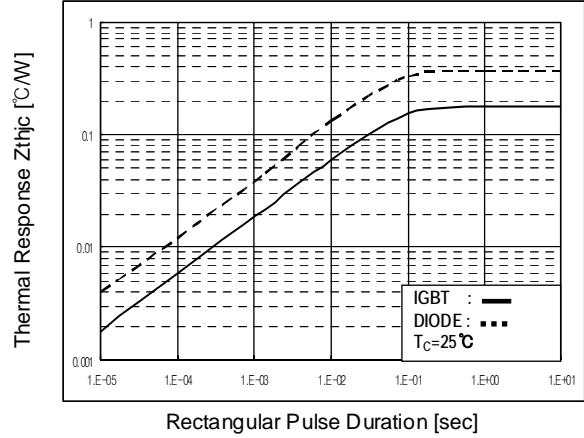


Fig 8. Transient Thermal Impedance

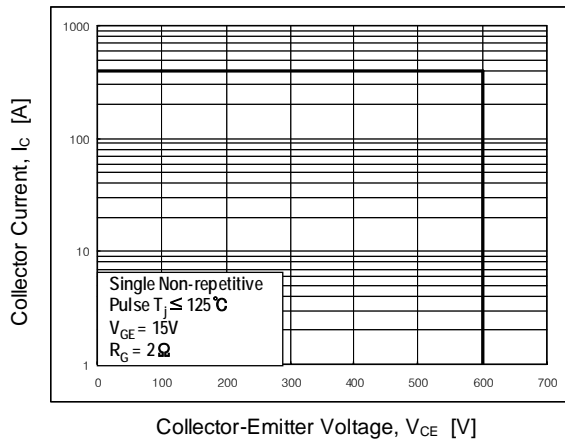


Fig 9. RBSOA Characteristic

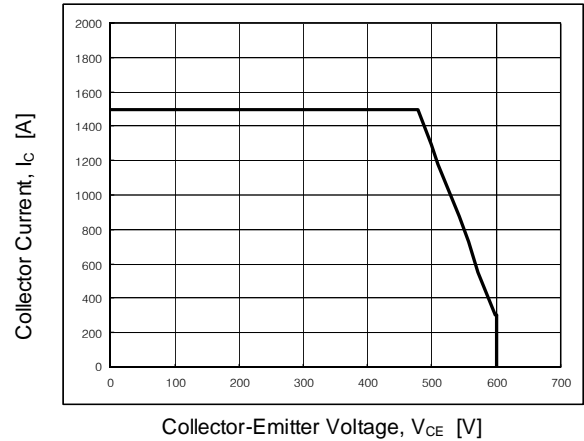


Fig 10. SCSOA Characteristic

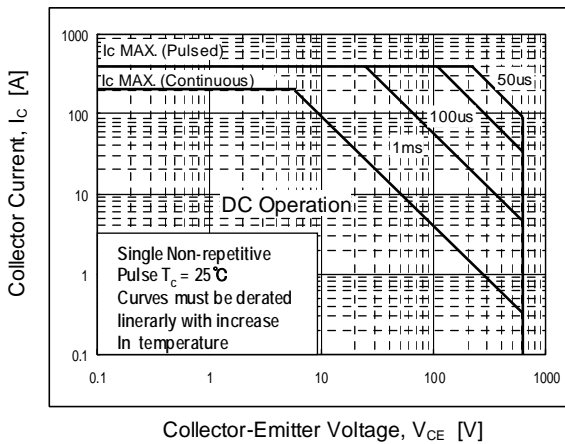


Fig11. SOA characteristics

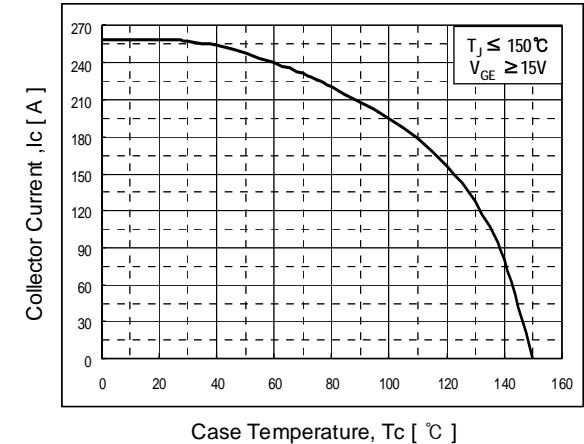


Fig 12. rated Current vs. Case Temperature

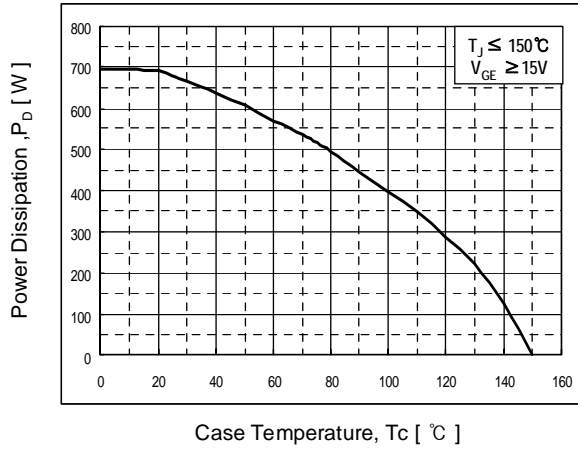


Fig 13. Power Dissipation vs. Case Temperature

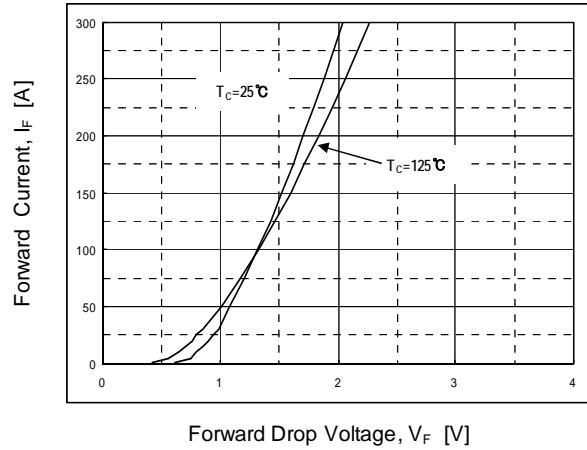


Fig 14. Forward characteristics

Package Out Line Information

7DM-2

