


(MG50J2YS40)

HIGH POWER SWITCHING APPLICATIONS.  
 MOTOR CONTROL APPLICATIONS.


Unit in mm

- High Input Impedance
- High Speed :  $t_f = 0.35 \mu s$  (Max.)  
 :  $t_{rr} = 0.15 \mu s$  (Max.)
- Low Saturation Voltage  
 :  $V_{CE(sat)} = 3.5V$  (Max.)
- Includes a Complete Half Bridge in One Package.
- Enhancement-Mode
- The Electrodes are Isolated from Case.

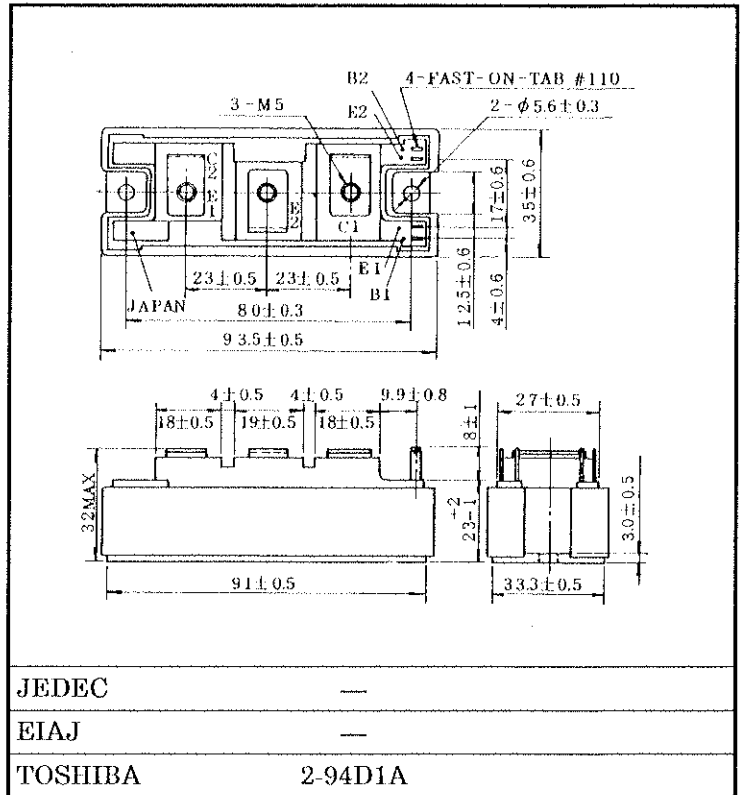

Weight : 202 g

EQUIVALENT CIRCUIT

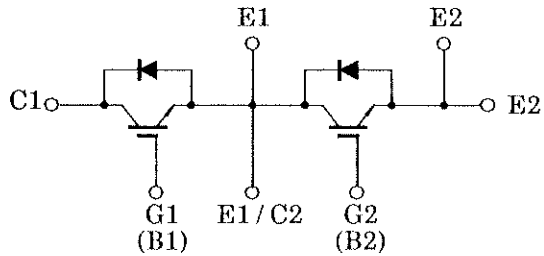

MAXIMUM RATINGS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Emitter Voltage	$V_{CES}$	600	V
Gate-Emitter Voltage	$V_{GES}$	±20	V
Collector Current	DC	$I_C$	A
	1ms	$I_{CP}$	
Forward Current	DC	$I_F$	A
	1ms	$I_{FM}$	
Collector Power Dissipation	$P_C$	250	W
Junction Temperature	$T_j$	150	°C
Storage Temperature Range	$T_{stg}$	-40~125	°C
Isolation Voltage	$V_{Isol}$	2500 (AC, 1 min.)	V
Screw Torque (Terminal / Mounting)	—	3 / 3	N · m







③ The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.  
 ④ These TOSHIBA products are intended for use in general commercial applications (office equipment, communication equipment, measuring equipment, domestic appliances, etc.) please make sure that you consult with us before you use these TOSHIBA products in equipment which requires extraordinarily high quality and/or reliability, and in equipment which may involve life threatening or critical application, including but not limited to such uses as atomic energy control, airplane or spaceship instrumentation, traffic signals, medical instrumentation, combustion control, all types of safety devices, etc. TOSHIBA cannot accept and hereby disclaims liability for any damage which may occur in case the TOSHIBA products are used in such equipment or applications without prior consultation with TOSHIBA.

(MG50J2YS40)

ELECTRICAL CHARACTERISTICS (Ta = 25°C)


CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Gate Leakage Current		I <sub>GES</sub>	V <sub>GE</sub> = ±20V, V <sub>CE</sub> = 0	—	—	±500	nA
Collector Cut-off Current		I <sub>CES</sub>	V <sub>CE</sub> = 600V, V <sub>GE</sub> = 0	—	—	1.0	mA
Collector-Emitter Breakdown Voltage		V <sub>(BR)CES</sub>	I <sub>C</sub> = 10mA, V <sub>GE</sub> = 0	600	—	—	V
Gate-Emitter Cut-off Voltage		V <sub>GE(off)</sub>	I <sub>C</sub> = 50mA, V <sub>CE</sub> = 5V	3.0	—	6.0	V
Collector-Emitter Saturation Voltage		V <sub>CE(sat)</sub>	I <sub>C</sub> = 50A, V <sub>GE</sub> = 15V	—	2.7	3.5	V
Input Capacitance		C <sub>ies</sub>	V <sub>CE</sub> = 10V, V <sub>GE</sub> = 0, f = 1MHz	—	4000	—	pF
Switching Time	Rise Time	t <sub>r</sub>		—	0.30	0.60	μs
	Turn-on Time	t <sub>on</sub>		—	0.40	0.80	
	Fall Time	t <sub>f</sub>		—	0.18	0.35	
	Turn-off Time	t <sub>off</sub>		—	0.60	1.00	
Forward Voltage		V <sub>F</sub>	I <sub>F</sub> = 50A, V <sub>GE</sub> = 0	—	1.7	2.5	V
Reverse Recovery Time		t <sub>rr</sub>	I <sub>F</sub> = 50A, V <sub>GE</sub> = -10V di / dt = 100A / μs	—	0.08	0.15	μs
Thermal Resistance		R <sub>th(j-c)</sub>	Transistor	—	—	0.50	°C / W
			Diode	—	—	1.00	

(MG50J2YS40)

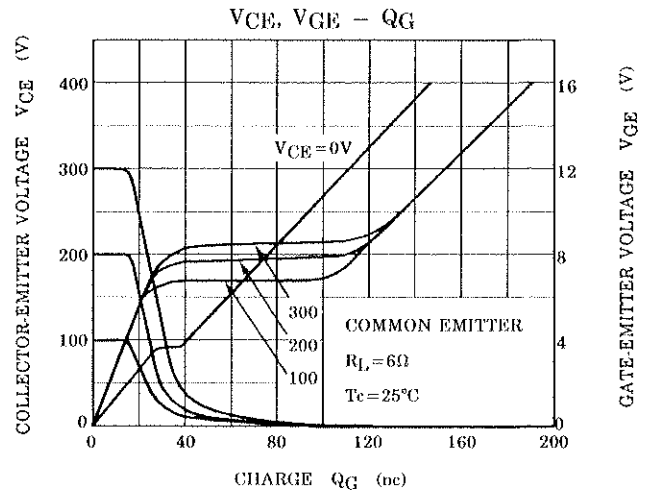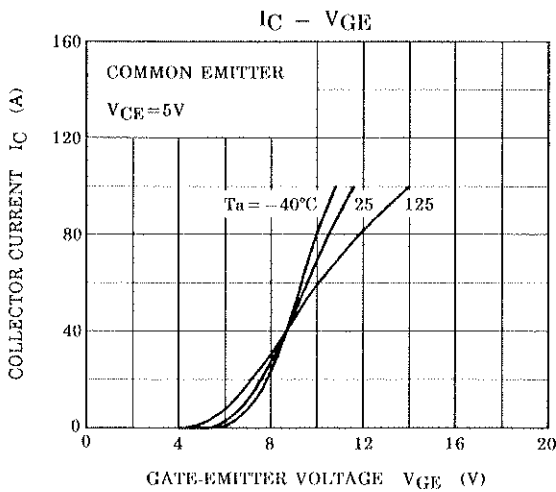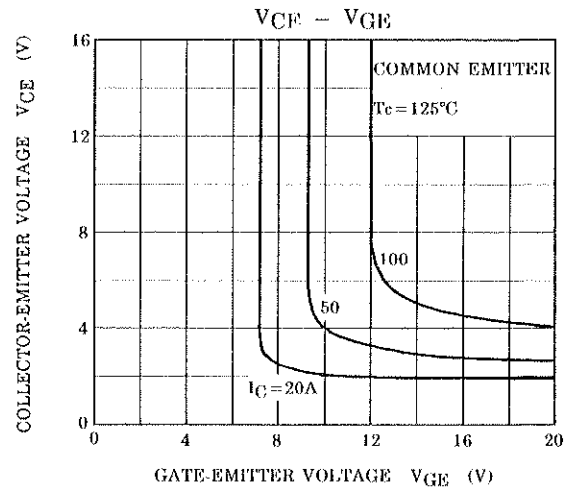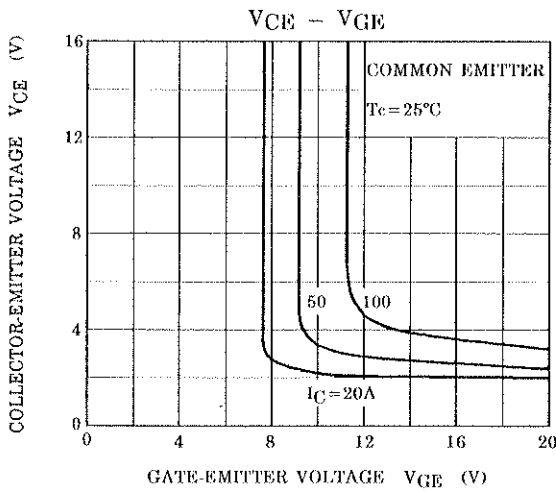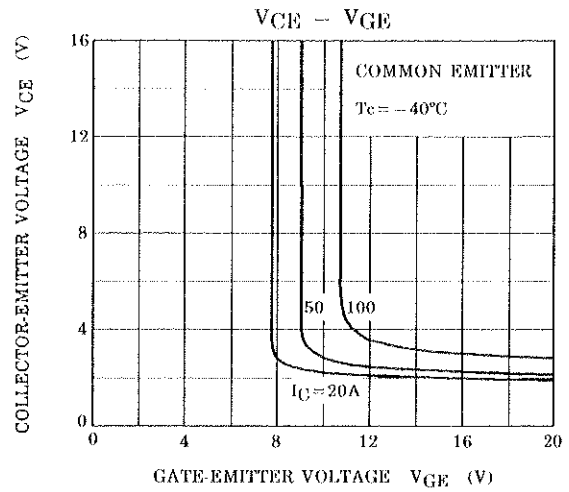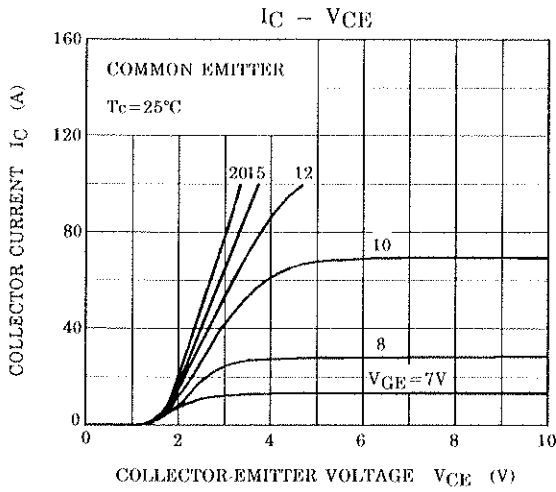


(MG50J2YS40)


SWITCHING TIME -  $I_C$

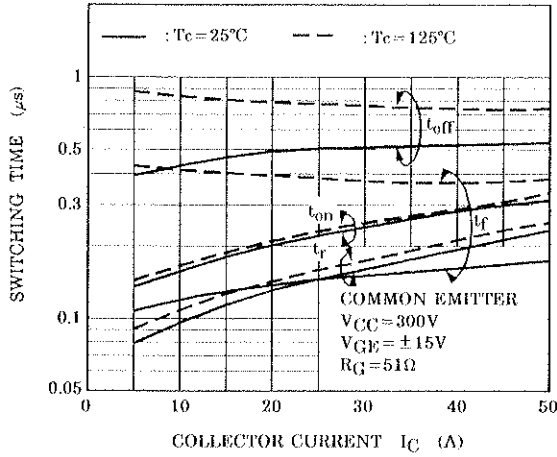


SWITCHING TIME -  $R_G$

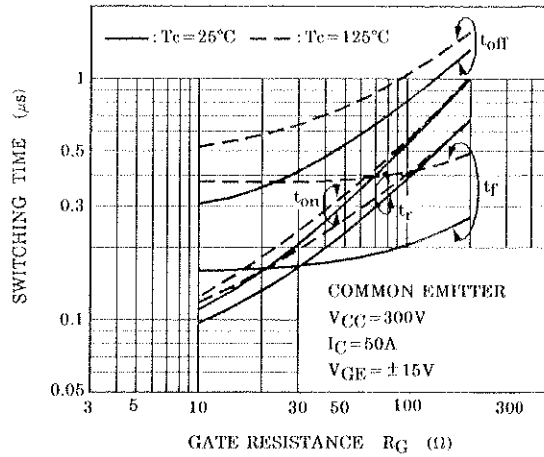


$I_F - V_F$

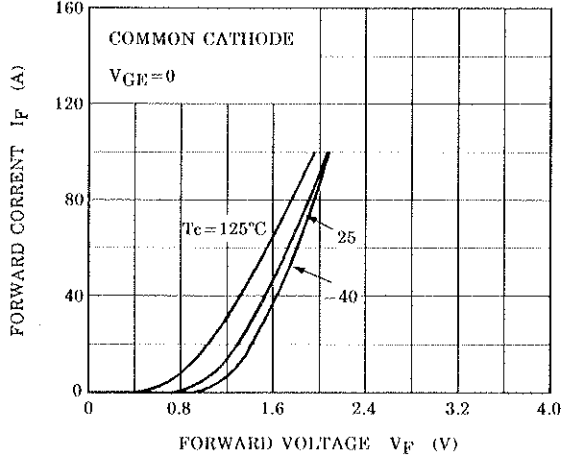


$t_{rr}, I_{rr} - I_F$

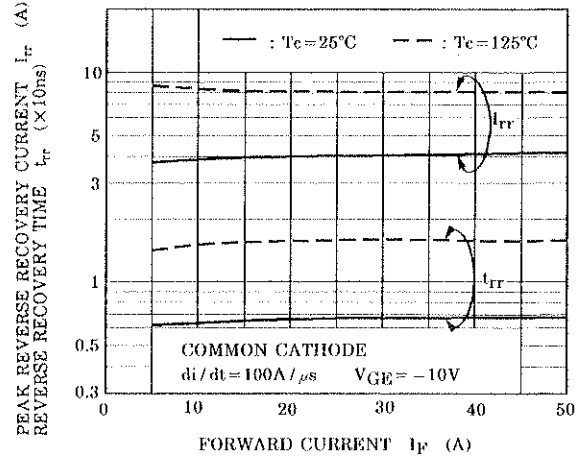

C -  $V_{CE}$

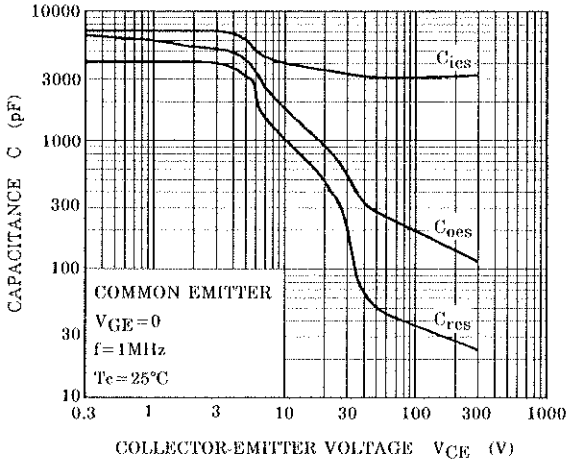

$R_{th}(t) - t_w$

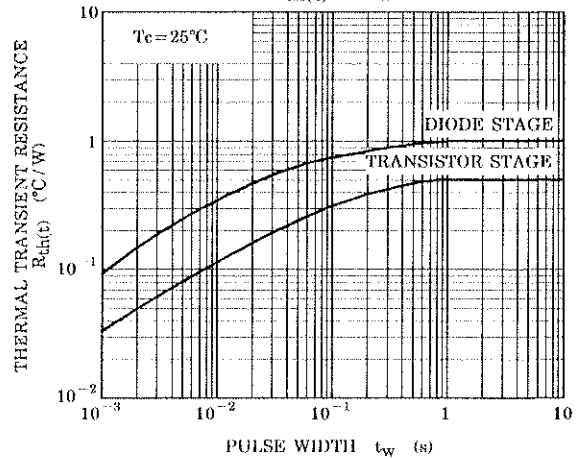

(MG50J2YS40)

