

# TRANSISTOR MODULE (THREE PHASES BRIDGE TYPE)

## QF15AA40/60

TOP





**QF15AA** is six pack Darlington power transistor module which has six transistors connected in three phase bridge configuration. Each transistor has a reverse paralleled fast recovery diode. The mounting base of the module is electrically isolated from semiconductor elements for simple heatsink construction.

- $I_C = 15A$ ,  $V_{CE(X)} = 400/600V$
- Low saturation voltage for higher efficiency.
- High DC current gain  $h_{FE}$
- Isolated mounting base
- $V_{EB(O)} 10V$  for faster switching speed.

### (Applications)

Motor Control (VVVF), AC Servo, UPS

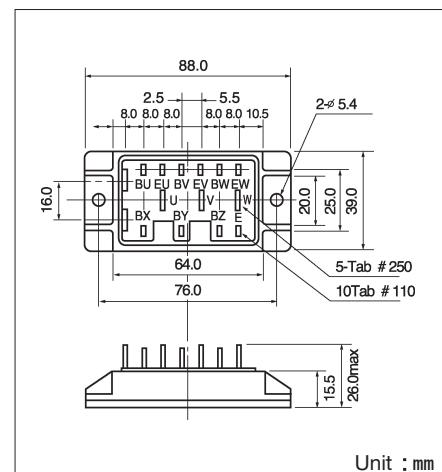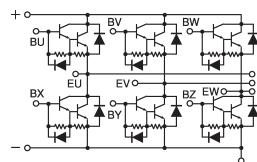

Unit : mm

### ■ Maximum Ratings

( $T_j = 25^\circ C$ )

Symbol	Item	Conditions	Ratings		Unit
			QF15AA40	QF15AA60	
$V_{CBO}$	Collector-Base Voltage		400	600	V
$V_{CEX}$	Collector-Emitter Voltage	$V_{BE} = -2V$	400	600	V
$V_{EBO}$	Emitter-Base Voltage			10	V
$I_C$	Collector Current	( ) = pw $\leq 1ms$		15 (30)	A
$-I_C$	Reverse Collector Current			15	A
$I_B$	Base Current			1	A
$P_T$	Total power dissipation	$T_c = 25^\circ C$		100	W
$T_j$	Junction Temperature			-40 ~ +150	°C
$T_{stg}$	Storage Temperature			-40 ~ +125	°C
$V_{iso}$	Isolation Voltage	A.C. 1 minute		2500	V
	Mounting Torque (M5)	Recommended Value 1.5 ~ 2.5 (15 ~ 25)		2.7 (28)	N · m (kgf · cm)
	Mass	Typical Value		95	g

### ■ Electrical Characteristics

( $T_j = 25^\circ C$ )

Symbol	Item	Conditions	Ratings		Unit
			Min.	Max.	
$I_{CBO}$	Collector Cut-off Current	$V_{CB} = V_{CBO}$		1.0	mA
$I_{EBO}$	Emitter Cut-off Current	$V_{EB} = V_{EBO}$		100	mA
$V_{CEO(SUS)}$	Collector Emitter Sustaining Voltage	$QF15AA40$ $QF15AA60$	$I_C = 1A$	300	V
				450	
$V_{CEX(SUS)}$		$QF15AA40$ $QF15AA60$	$I_C = 3A$ , $I_{B2} = -1A$	400	V
				600	
$h_{FE}$	DC Current Gain	$I_C = 15A$ , $V_{CE} = 2V$		75	
		$I_C = 15A$ , $V_{CE} = 5V$		100	
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C = 15A$ , $I_B = 0.2A$		2.0	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	$I_C = 15A$ , $I_B = 0.2A$		2.5	V
$t_{on}$	Switching Time	On Time	$V_{CC} = 300V$ , $I_C = 15A$ $I_{B1} = 0.4A$ , $I_{B2} = -0.4A$	1.0	$\mu s$
$t_s$		Storage Time		12.0	
$t_f$		Fall Time		2.0	
$V_{ECO}$	Collector-Emitter Reverse Voltage	$-I_C = 15A$		1.5	V
$R_{th(j-c)}$	Thermal Impedance (junction to case)	Transistor part		1.2	$^\circ C/W$
		Diode part		2.5	