

PRELIMINARY
Notice: This is not a final specification.
Some parametric limits are subject to change.

MITSUBISHI DIODE MODULES

RM20TPM-24,-2H

HIGH VOLTAGE MEDIUM POWER GENERAL USE
INSULATED TYPE

RM20TPM-24,-2H




- I_o DC output current **40A**
- V_{RRM} Repetitive peak reverse voltage **1200/1600V**
- **3 phase bridge**
- **Insulated Type**

APPLICATION

AC motor controllers, DC motor controllers, Battery DC power supplies,
DC power supplies for control panels, and other general DC power equipment

OUTLINE DRAWING & CIRCUIT DIAGRAM

Dimensions in mm

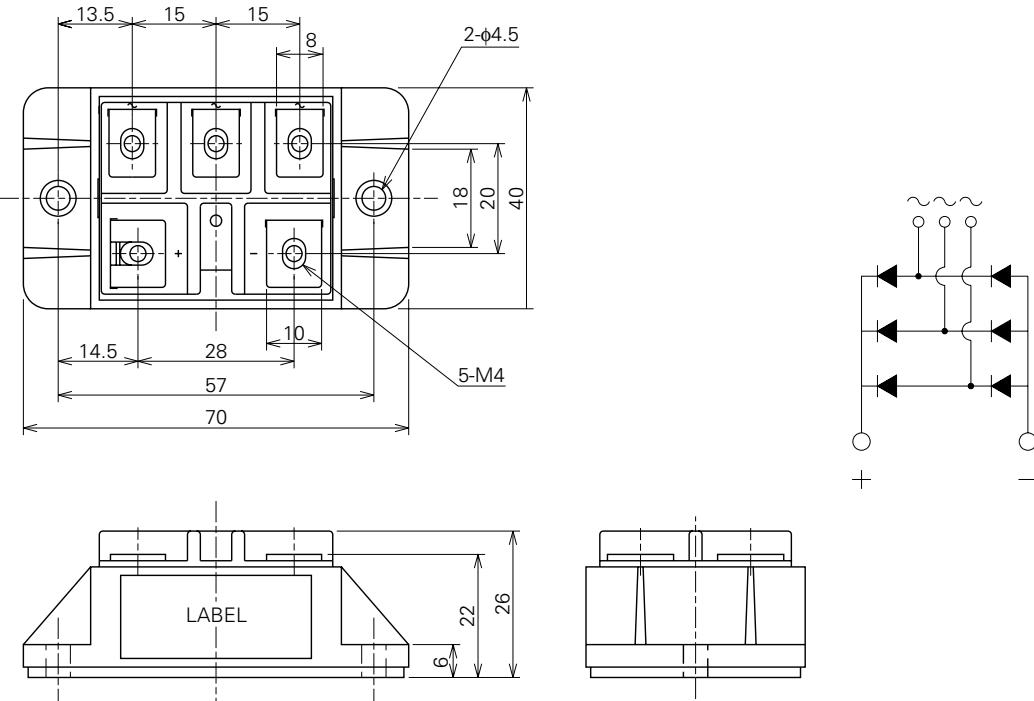

Feb.1999

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Voltage class		Unit
		24	2H	
V _R RM	Repetitive peak reverse voltage	1200	1600	V
V _R SM	Non-repetitive peak reverse voltage	1350	1700	V
E _a	Recommended AC input voltage	370	480	V

Symbol	Parameter	Conditions	Ratings	Unit
I _O	DC output current	Three-phase full wave rectifying circuit, T _c =125°C	40	A
I _{FSM}	Surge (non-repetitive) forward current	One half cycle at 60Hz, peak value	400	A
I ² t	I ² t for fusing	Value for one cycle of surge current	6.7x10 ²	A ² s
f	Maximum operating frequency		1000	Hz
T _j	Junction temperature		-40~150	°C
T _{stg}	Storage temperature		-40~125	°C
V _{iso}	Isolation voltage	Charged part to case	2500	V
—	Mounting torque	Main terminal screw M4	0.98~1.47	N·m
			10~15	kg·cm
		Mounting screw M4	0.98~1.47	N·m
	Weight	Typical value	100	g

ELECTRICAL CHARACTERISTICS

Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
I _{RRM}	Repetitive reverse current	T _j =125°C, V _R RM applied	—	—	10	mA
V _F M	Forward voltage	T _j =25°C, I _F M=40A, instantaneous meas.	—	—	1.25	V
R _{th} (j-c)	Thermal resistance	Junction to case	—	—	0.35	°C/W
R _{th} (c-f)	Contact thermal resistance	Case to fin, conductive grease applied	—	—	0.09	°C/W
—	Insulation resistance	Measured with a 500V megohmmeter between main terminal and case	10	—	—	MΩ