

## SEMIstart

### Antiparallel thyristors for softstart

#### SKKQ 1300

#### Preliminary Data

#### Features

- Compact design
- Thyristor with amplifying gate
- Pressure contact technology

#### Typical Applications

- Soft Starters

#### Remarks

- Please note: This module has no soft mold protection around the chip. It is therefore susceptible to environmental influences (dust, humidity, etc.). The humidity test according to IEC60068-2-67 is not passed by this product.


1)  $T_{vjmax}$  up to 150°C is allowable for overload conditions, max. time period for the overload condition is 20s.

#### Absolute Maximum Ratings




| Symbol             | Conditions  | Values                     | Units            |
|--------------------|---|----------------------------|------------------|
| $I_{overload}$     | W1C; sin. 180°; 20 sec.; $T_{vjmax} = 150\text{ °C}$ ; $T_{vjstart} = 40\text{ °C}$ | 1225                       | A                |
| $I_{TSM}$          | $T_{vj} = 25\text{ °C}$ ; 10 ms   | 9500                       | A                |
|                    | $T_{vj} = 125\text{ °C}$ ; 10 ms  | 8000                       | A                |
| $I^2t$             | $T_{vj} = 25\text{ °C}$ ; 8,3 ... 10 ms   | 451000                     | A <sup>2</sup> s |
|                    | $T_{vj} = 125\text{ °C}$ ; 8,3 ... 10 ms  | 320000                     | A <sup>2</sup> s |
| SKKQ 1300/14       |   |                            |                  |
| $V_{RSM}$          |   | 1500                       | V                |
| $V_{RRM}; V_{DRM}$ |   | 1400                       | V                |
| SKKQ 1300/18       |   |                            |                  |
| $V_{RSM}$          |   | 1900                       | V                |
| $V_{RRM}; V_{DRM}$ |   | 1800                       | V                |
| $T_{vj}$           |   | -40 ... +125 <sup>1)</sup> | °C               |
| $T_{stg}$          |   | -40 ... +125               | °C               |

#### Characteristics

| Symbol           | Conditions  | min. | typ.    | max. | Units |
|------------------|---|------|---------|------|-------|
| $V_T$            | $T_{vj} = 25\text{ °C}$ ; $I_T = 1500\text{ A}$                                   |      |         | 1,65 | V     |
| $V_{T(TO)}$      | $T_{vj} = 125\text{ °C}$  |      |         | 0,9  | V     |
| $r_T$            | $T_{vj} = 125\text{ °C}$  |      |         | 0,55 | mΩ    |
| $I_{DD}; I_{RD}$ | $T_{vj} = 125\text{ °C}$ ; $V_{RD} = V_{RRM}$ ; per module                        |      |         | 180  | mA    |
| $t_{gd}$         | $T_{vj} = 25\text{ °C}$ ; $I_G = 1\text{ A}$ ; $di_G/dt = 1\text{ A}/\mu\text{s}$ |      | 1       |      | μs    |
| $t_{gr}$         | $V_D = 0,67 * V_{DRM}$  |      | 2       |      | μs    |
| $(dv/dt)_{cr}$   | $T_{vj} = 125\text{ °C}$  |      | 1000    |      | V/μs  |
| $(di/dt)_{cr}$   | $T_{vj} = 125\text{ °C}$ ; $f = 50 \dots 60\text{ Hz}$                            |      | 200     |      | A/μs  |
| $t_q$            | $T_{vj} = 125\text{ °C}$  |      | 200     |      | μs    |
| $I_H$            | $T_{vj} = 25\text{ °C}$   |      | 150     | 500  | mA    |
| $I_L$            | $T_{vj} = 25\text{ °C}$ ; $R_G = 33\ \Omega$                                      |      | 300     | 2000 | mA    |
| $V_{GT}$         | $T_{vj} = 25\text{ °C}$ ; d.c.  | 3    |         |      | V     |
| $I_{GT}$         | $T_{vj} = 25\text{ °C}$ ; d.c.  | 200  |         |      | mA    |
| $V_{GD}$         | $T_{vj} = 125\text{ °C}$ ; d.c.   |      |         | 0,25 | V     |
| $I_{GD}$         | $T_{vj} = 125\text{ °C}$ ; d.c.   |      |         | 10   | mA    |
| $R_{th(j-s)}$    | cont.; per thyristor  |      |         | 0,04 | K/W   |
| $M_t$            |   |      | 5 ± 15% |      | Nm    |
| m                | approx.   |      | 1200    |      | g     |
| Case             |   |      | SKKQ    |      |       |
|                  |   |      | 1300    |      |       |



W1C

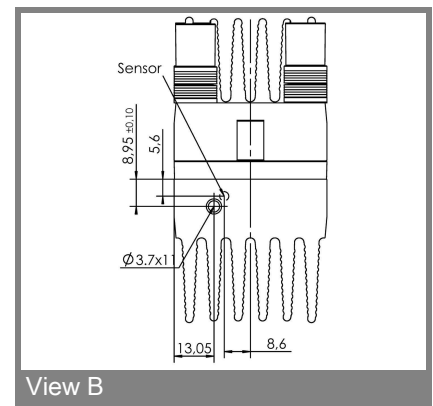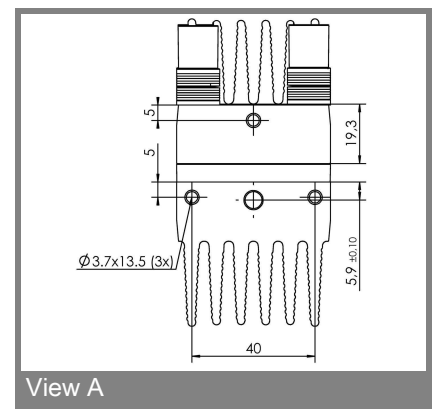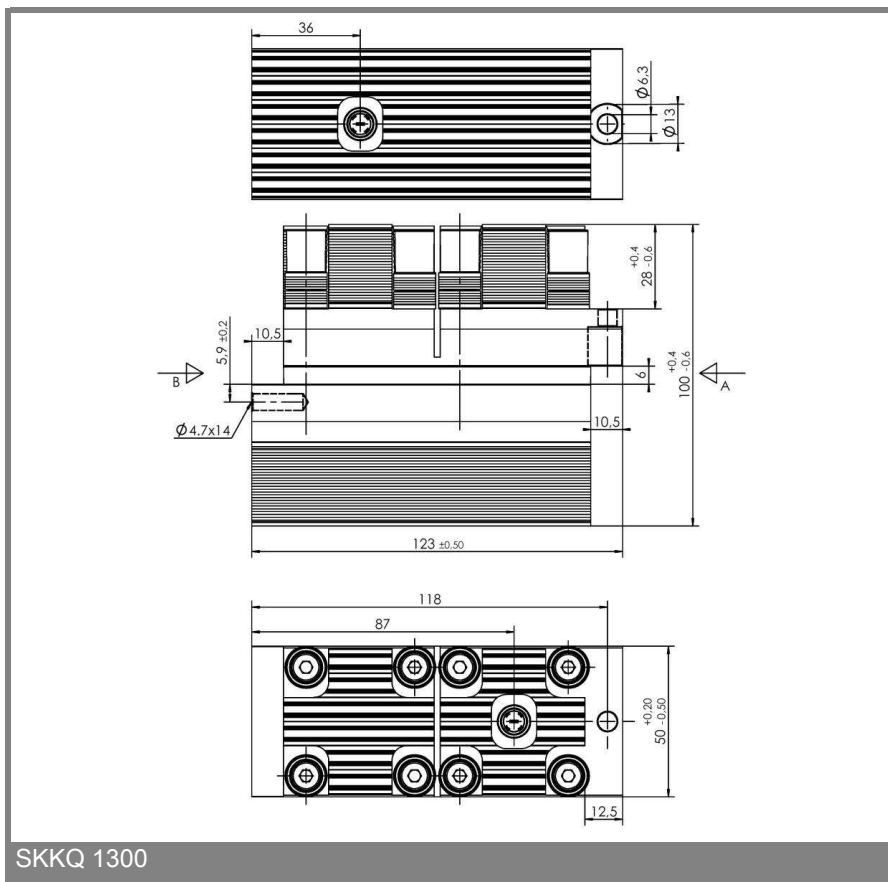

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.