

SKM50GB063D



SEMITRANS® 2

Superfast NPT-IGBT Modules

SKM50GB063D


Target Data

Features

- NPT = non punch-through IGBT technology
- High short circuit capability, self limiting to 6 x IC
- Pos. temp.-coeff. of VCEsat
- Isolated copper baseplate

Typical Applications*

- Switched mode power supplies
- UPS
- Three phase inverters for servo / AC motor speed control

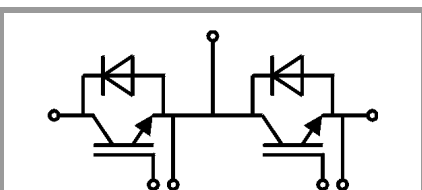

GB

| Absolute Maximum Ratings | | | | |
|--------------------------|--|-------------------------|------|----|
| Symbol | Conditions | Values | Unit | |
| IGBT | | | | |
| V _{CEs} | T _j = 25 °C | 600 | V | |
| I _C | T _j = 150 °C | T _c = 25 °C | 70 | A |
| | | T _c = 75 °C | 51 | A |
| I _{Cnom} | | 50 | A | |
| I _{CRM} | I _{CRM} = 2xI _{Cnom} | 100 | A | |
| V _{GES} | | -20 ... 20 | V | |
| t _{psc} | V _{CC} = 300 V | T _j = 125 °C | 10 | µs |
| | V _{GE} ≤ 20 V | | | |
| | V _{CEs} ≤ 600 V | | | |
| T _j | | -55 ... 150 | °C | |
| Inverse diode | | | | |
| I _F | | T _c = 25 °C | 75 | A |
| | | T _c = 80 °C | 45 | A |
| I _{Fnom} | | 50 | A | |
| I _{FRM} | I _{FRM} = 2xI _{Fnom} | 100 | A | |
| I _{FSM} | t _p = 10 ms, sin 180°, T _j = 25 °C | | A | |
| T _j | | -40 ... 150 | °C | |
| Module | | | | |
| I _{t(RMS)} | T _{terminal} < 80 °C | 200 | A | |
| T _{stg} | | -40 ... 125 | °C | |
| V _{isol} | AC sinus 50Hz, t = 1 min | 2500 | V | |

| Characteristics | | | | | |
|----------------------|---|-------------------------|------|------|------|
| Symbol | Conditions | min. | typ. | max. | Unit |
| IGBT | | | | | |
| V _{CE(sat)} | I _C = 50 A V _{GE} = 15 V chipelevel | T _j = 25 °C | 2.1 | 2.5 | V |
| | | T _j = 125 °C | 2.4 | 2.8 | V |
| V _{CE0} | | T _j = 25 °C | 1.05 | 1.3 | V |
| | | T _j = 125 °C | 1 | 1.2 | V |
| r _{CE} | V _{GE} = 15 V | T _j = 25 °C | 21.0 | 24.0 | mΩ |
| | | T _j = 125 °C | 28.0 | 32.0 | mΩ |
| V _{GE(th)} | V _{GE} =V _{CE} , I _C = 1 mA | 4.5 | 5.5 | 6.5 | V |
| I _{CES} | V _{GE} = 0 V V _{CE} = 600 V | T _j = 25 °C | 0.1 | 0.3 | mA |
| | | | | | mA |
| C _{ies} | V _{CE} = 25 V | | 2.2 | | nF |
| C _{oes} | V _{GE} = 0 V | | | | nF |
| C _{res} | | | 0.2 | | nF |
| Q _G | V _{GE} = - 8 V...+ 20 V | | | | nC |
| R _{Gint} | T _j = 25 °C | | | | Ω |
| t _{d(on)} | V _{CC} = 300 V | T _j = 125 °C | 50 | | ns |
| t _r | I _C = 50 A V _{GE} = ±15 V | T _j = 125 °C | 40 | | ns |
| | | | | | |
| E _{on} | R _{G on} = 22 Ω | T _j = 125 °C | 2.5 | | mJ |
| t _{d(off)} | R _{G off} = 22 Ω | T _j = 125 °C | 300 | | ns |
| t _f | | T _j = 125 °C | 30 | | ns |
| E _{off} | | T _j = 125 °C | 1.8 | | mJ |
| R _{th(j-c)} | per IGBT | | | 0.5 | K/W |



SEMITRANS® 2

Superfast NPT-IGBT Modules

SKM50GB063D

Target Data


Features

- NPT = non punch-through IGBT technology
- High short circuit capability, self limiting to 6 x IC
- Pos. temp.-coeff. of VCEsat
- Isolated copper baseplate

Typical Applications*

- Switched mode power supplies
- UPS
- Three phase inverters for servo / AC motor speed control

| Characteristics | | | | | | |
|----------------------|---|-----------------------|------|------|------|------|
| Symbol | Conditions | | min. | typ. | max. | Unit |
| Inverse diode | | | | | | |
| $V_F = V_{EC}$ | $I_F = 50\text{ A}$ $V_{GE} = 0\text{ V}$ chip | $T_j = 25\text{ °C}$ | | 1.35 | 1.60 | V |
| | | $T_j = 125\text{ °C}$ | | 1.35 | 1.60 | V |
| V_{F0} | | $T_j = 25\text{ °C}$ | | 1.05 | 1.2 | V |
| | | $T_j = 125\text{ °C}$ | | 0.9 | 1 | V |
| r_F | | $T_j = 25\text{ °C}$ | | 6.0 | 8.0 | mΩ |
| | | $T_j = 125\text{ °C}$ | | 9.0 | 12.0 | mΩ |
| I_{RRM} | $I_F = 50\text{ A}$ | $T_j = 125\text{ °C}$ | | 31 | | A |
| Q_{rr} | $di/dt_{off} = 50\text{ A}/\mu\text{s}$ | $T_j = 125\text{ °C}$ | | 3.2 | | μC |
| E_{rr} | $V_{GE} = \pm 15\text{ V}$ $V_{CC} = 300\text{ V}$ | $T_j = 125\text{ °C}$ | | 0.48 | | mJ |
| $R_{th(j-c)}$ | per diode | | | | 1 | K/W |
| Module | | | | | | |
| L_{CE} | | | | | 30 | nH |
| $R_{CC'+EE'}$ | terminal-chip | $T_C = 25\text{ °C}$ | | 0.65 | | mΩ |
| | | $T_C = 125\text{ °C}$ | | 1 | | mΩ |
| $R_{th(c-s)}$ | per module | | | 0.04 | 0.05 | K/W |
| M_s | to heat sink M6 | | | 3 | 5 | Nm |
| M_t | | to terminals M5 | | 2.5 | 5 | Nm |
| | | | | | | Nm |
| w | | | | | 160 | g |

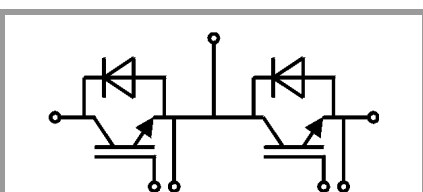

GB

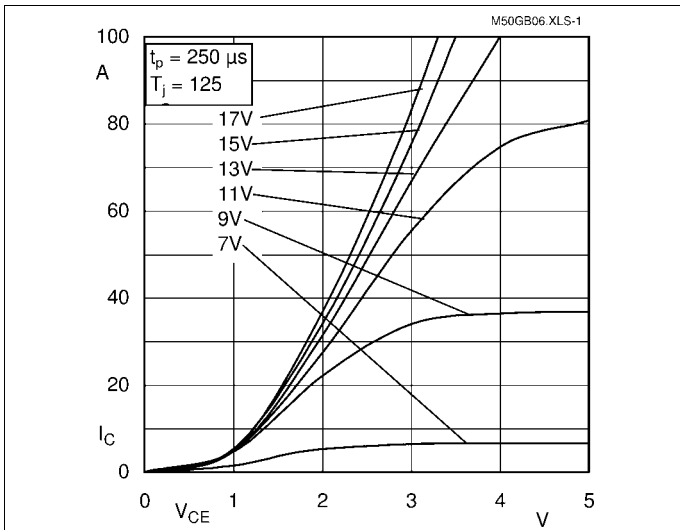


Fig. 1: Typ. output characteristic, inclusive $R_{CC'+EE}$

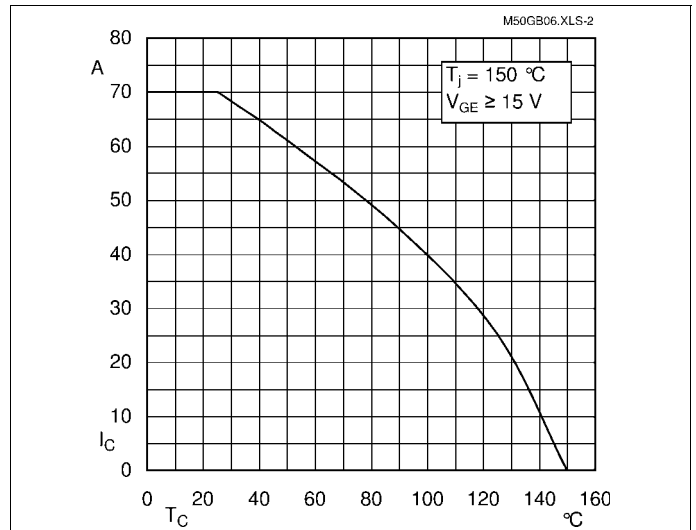


Fig. 2: Rated current vs. temperature $I_C = f(T_C)$

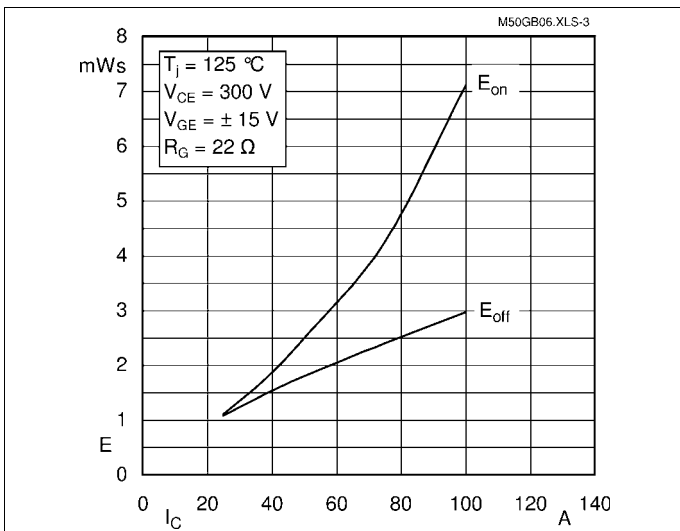


Fig. 3: Typ. turn-on /-off energy = $f(I_C)$

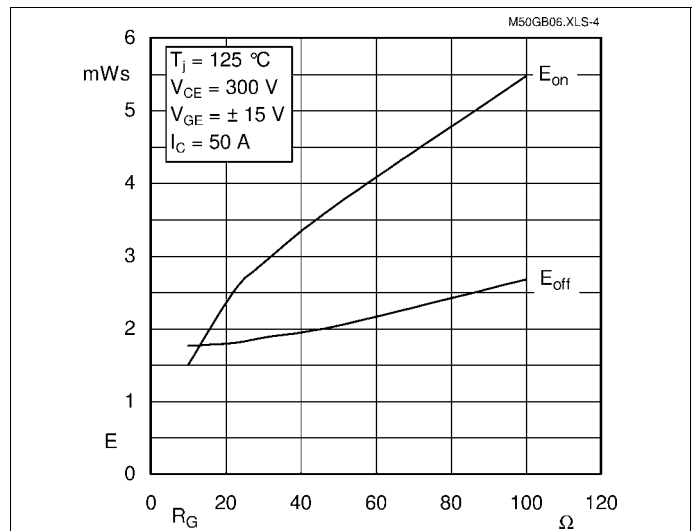


Fig. 4: Typ. turn-on /-off energy = $f(R_G)$

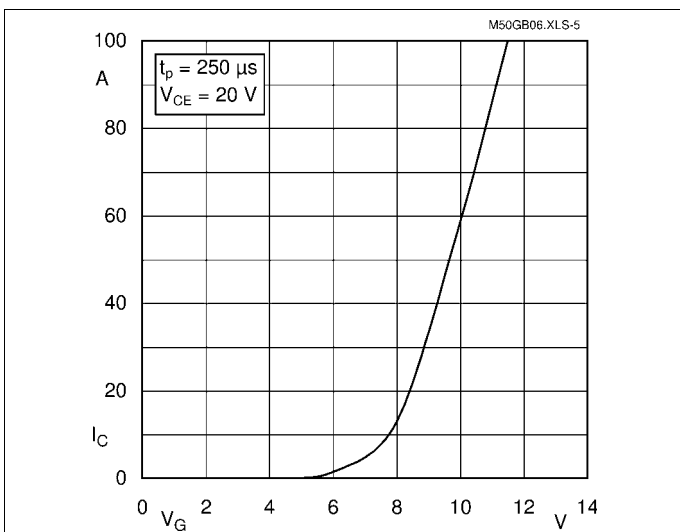


Fig. 5: Typ. transfer characteristic








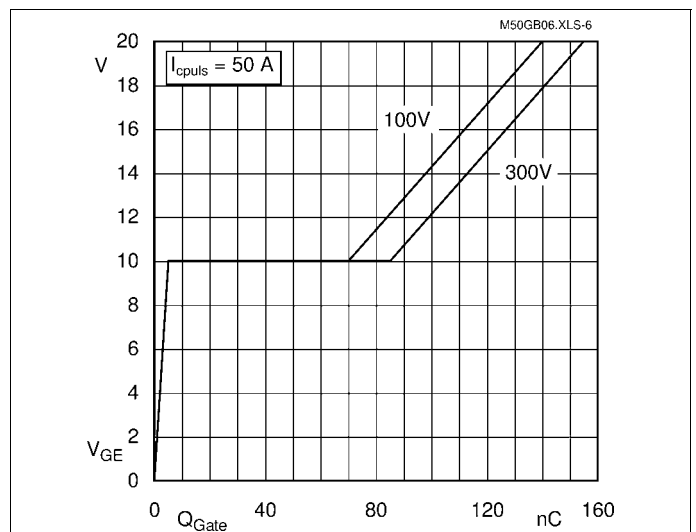



Fig. 6: Typ. gate charge characteristic

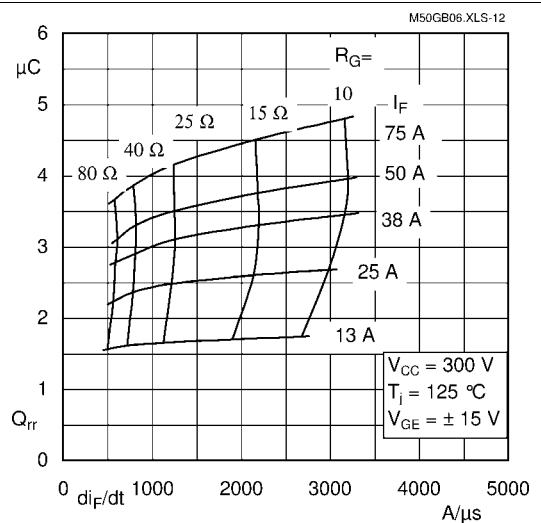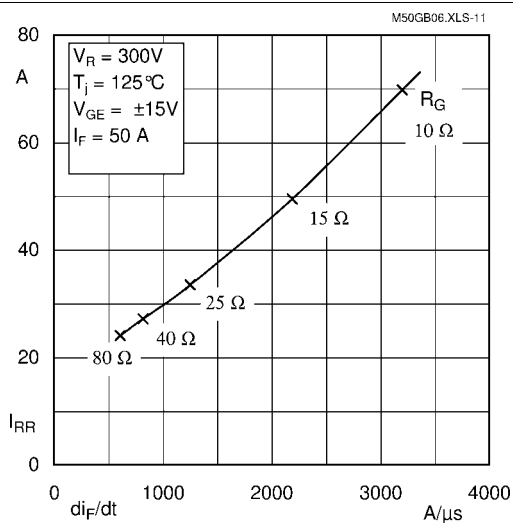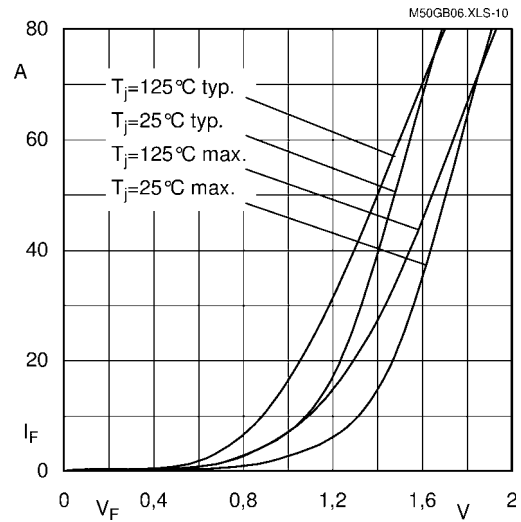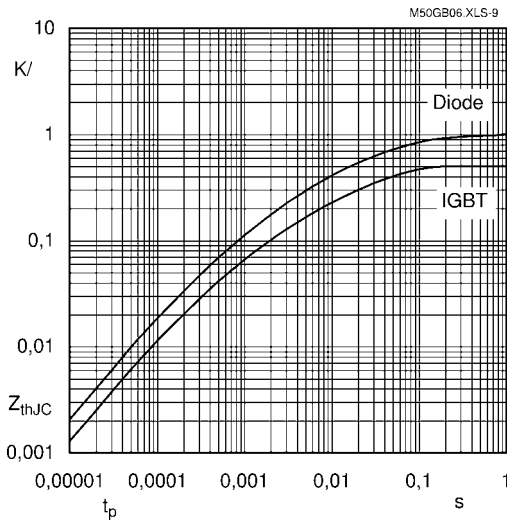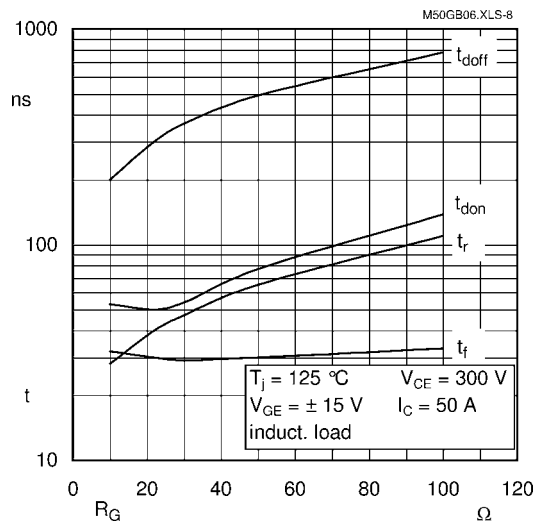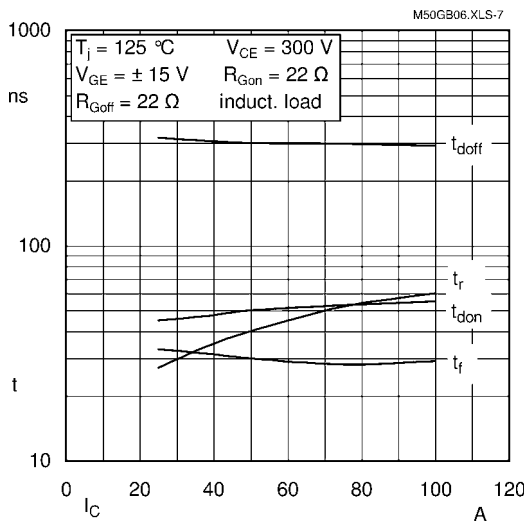

SKM50GB063D

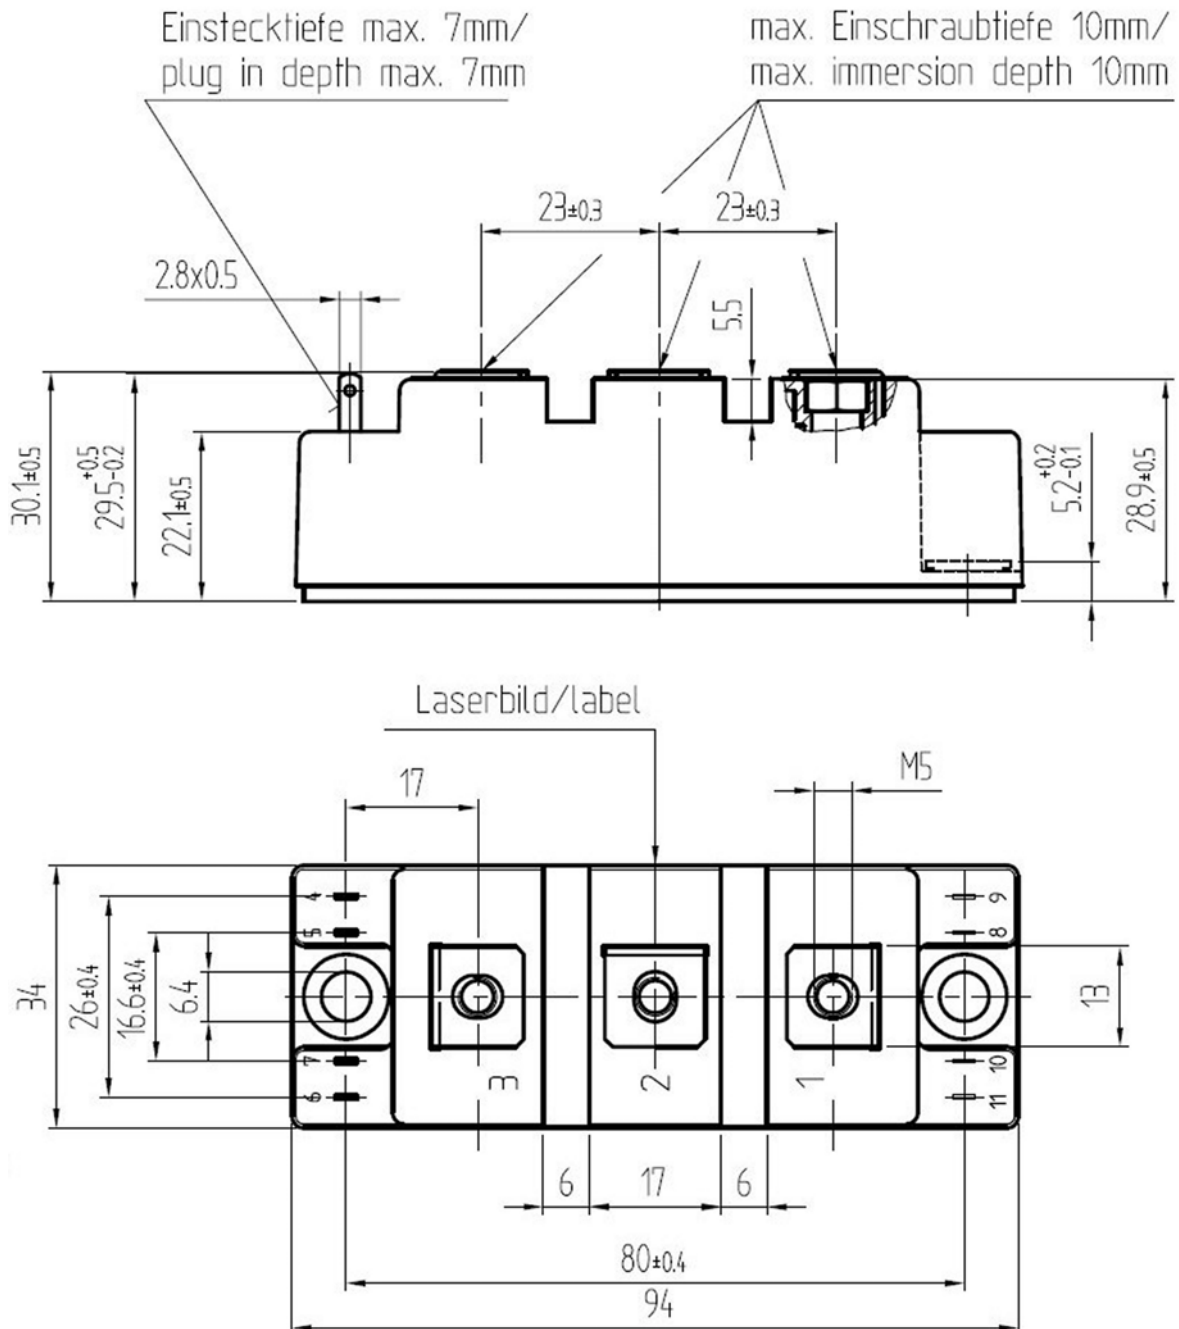

SEMITRANS 2

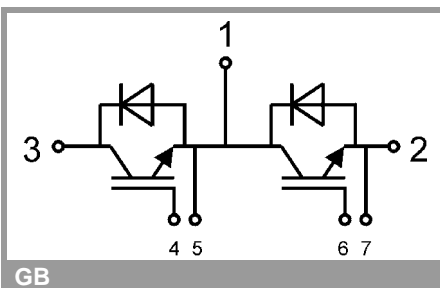

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX

* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our personal.