

MITSUBISHI THYRISTOR MODULES
TM55DZ/CZ-M,-H

MEDIUM POWER GENERAL USE
INSULATED TYPE

TM55DZ/CZ-M,-H



- **IT (AV)** Average on-state current **55A**
- **V_{RRM}** Repetitive peak reverse voltage **400/800V**
- **V_{DRM}** Repetitive peak off-state voltage **400/800V**
- **DOUBLE ARMS**
- **Insulated Type**
- **UL Recognized**

Yellow Card No. E80276 (N)


File No. E80271

APPLICATION


DC motor control, NC equipment, AC motor control, Contactless switches,
Electric furnace temperature control, Light dimmers

OUTLINE DRAWING & CIRCUIT DIAGRAM



Dimensions in mm

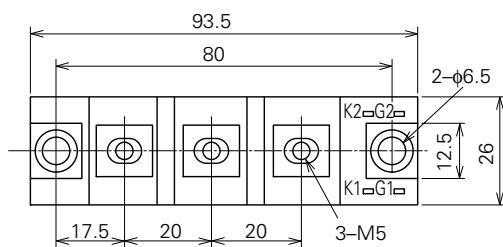

(DZ)

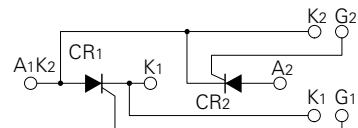

(CZ)

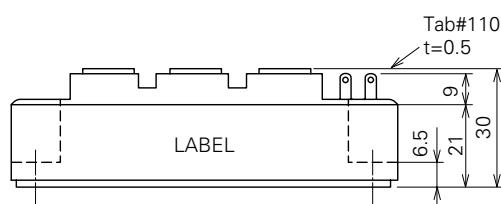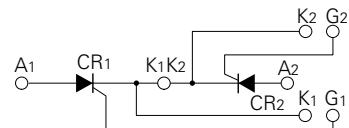

Feb.1999

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Voltage class		Unit
		M	H	
V _{RRM}	Repetitive peak reverse voltage	400	800	V
V _{RSM}	Non-repetitive peak reverse voltage	480	960	V
V _{R (DC)}	DC reverse voltage	320	640	V
V _{DRM}	Repetitive peak off-state voltage	400	800	V
V _{DSM}	Non-repetitive peak off-state voltage	480	960	V
V _{d (DC)}	DC off-state voltage	320	640	V

Symbol	Parameter	Conditions	Ratings	Unit
I _{T (RMS)}	RMS on-state current		86	A
I _{T (AV)}	Average on-state current	Single-phase, half-wave 180° conduction, T _c =86°C	55	A
I _{TS}	Surge (non-repetitive) on-state current	One half cycle at 60Hz, peak value	1100	A
I _f ² t	I _f ² t for fusing	Value for one cycle of surge current	5.0 × 10 ³	A ² s
dI/dt	Critical rate of rise of on-state current	V _D =1/2V _{DRM} , I _G =1.0A, T _j =125°C	100	A/μs
P _{GM}	Peak gate power dissipation		5.0	W
P _{G (AV)}	Average gate power dissipation		0.5	W
V _{FGM}	Peak gate forward voltage		10	V
V _{RGM}	Peak gate reverse voltage		5.0	V
I _{FGM}	Peak gate forward current		2.0	A
T _j	Junction temperature		-40~+125	°C
T _{Stg}	Storage temperature		-40~+125	°C
V _{iso}	Isolation voltage	Charged part to case	2500	V
—	Mounting torque	Main terminal screw M5	1.47~1.96	N·m
			15~20	kg·cm
		Mounting screw M6	1.96~2.94	N·m
			20~30	kg·cm
—	Weight	Typical value	160	g

ELECTRICAL CHARACTERISTICS

Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
I _{RRM}	Repetitive peak reverse current	T _j =125°C, V _{RRM} applied	—	—	10	mA
I _{DRM}	Repetitive peak off-state current	T _j =125°C, V _{DRM} applied	—	—	10	mA
V _{TM}	On-state voltage	T _j =125°C, I _T =165A, instantaneous meas.	—	—	1.35	V
dV/dt	Critical rate of rise of off-state voltage	T _j =125°C, V _D =2/3V _{DRM}	500	—	—	V/μs
V _{GT}	Gate trigger voltage	T _j =25°C, V _D =6V, R _L =2Ω	—	—	3.0	V
V _{GD}	Gate non-trigger voltage	T _j =125°C, V _D =1/2V _{DRM}	0.25	—	—	V
I _{GT}	Gate trigger current	T _j =25°C, V _D =6V, R _L =2Ω	15	—	100	mA
R _{th (j-c)}	Thermal resistance	Junction to case (per 1/2 module)	—	—	0.5	°C/W
R _{th (c-f)}	Contact thermal resistance	Case to fin, conductive grease applied (per 1/2 module)	—	—	0.2	°C/W
—	Insulation resistance	Measured with a 500V megohmmeter between main terminal and case	10	—	—	MΩ