

C384 SERIES

FAST DISC TYPE THYRISTOR

Features

- Metal case with ceramic insulator
- All diffused design, Center amplifying gate
- High surge current capabilities
- Guaranteed hing dv/dt
- Guaranteed hing di/dt
- Low thermal impedance
- High speed performance


410A

Typical Applications

- Inverters
- Induction heating

Major Ratings and Characteristics

Parameters		Units
$I_{T(AV)}$	410	A
	@ T_{hs}	85 $^{\circ}\text{C}$
$I_{T(RMS)}$	656	A
	@ T_{hs}	25 $^{\circ}\text{C}$
I_{TSM}	@ 50Hz	4680 A
	@ 60Hz	4900 A
$I^2 t$	@ 50Hz	110 KA ² s
	@ 60Hz	100 KA ² s
V_{DRM} / V_{RRM}	1600	V
T_q typical	15	μs
T_J range	- 40 to 125	$^{\circ}\text{C}$

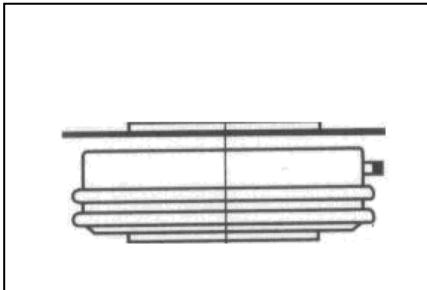

C384 SERIES

ELECTRICAL SPECIFICATIONS

Voltage Ratings

Type number	Voltage Code	V_{RRM} , maximum repetitive peak reverse voltage V	V_{RSM} , maximum non-repetitive peak rev. voltage V	I_{DRM}/I_{RRM} max. @ $T_J = T_{J\max}$. mA
C384PB	04	400	500	40
	08	800	900	
	10	1000	1100	
	16	1600	1700	

On-state Conduction

Parameter	C384PB	Units	Conditions			
$I_{T(AV)}$ Maximum average on-state current @ Heatsink temperature	410	A	180° conduction, half sine wave Double side(single side)cooled			
	65	°C				
$I_{(RMS)}$ Maximum RMS on-state current	656	A	DC@ 25°C heatsink temperature double side cooled			
I_{TSM} , Maximum peak, one-cycle non-repetitive surge current	4680	A	$t = 10ms$	No voltage	Sinusoidal half wave, Initial $T = T_{J\max}$.	
	4900		$t = 8.3ms$	reapplied		
	3940		$t = 10ms$	100% V_{RRM}		
	4120		$t = 8.3ms$	reapplied		
$I^2 t$ Maximum $I^2 t$ for fusing	110	KA ² s	$t = 10ms$	No voltage		
	100		$t = 8.3ms$	reapplied		
	77		$t = 10ms$	100% V_{RRM}		
	71		$t = 8.3ms$	reapplied		
$I^2 \sqrt{t}$ Maximum $I^2 \sqrt{t}$ for fusing	1100	KA ² √ s	$t = 0.1$ to 10ms, no voltage reapplied			
V_{TM} Max. peak on-state voltage	2.07	V	$I_{TM} = 1255A$, $T_J = T_{J\max}$, $t_p = 10ms$ sine wave pulse			
I_H Maximum holding current	600	mA	$T_J = 25^\circ C$, $I_T > 30A$			
I_L Typical latching current	1000		$T_J = 25^\circ C$, $V_A = 12V$, $R_a = 6\Omega$, $I_G = 1A$			

Switching

Parameter	C384PB	Units	Conditions	
di/dt Maximum non repetitive rate of rise of turned-on current	1000	A/μs	$T_J = T_{J\max}$, $V_{DRM} = \text{rated } V_{DRM}$	
			$I_{TM} = 2 \times di/dt$	
t_d Typical delay time	1.1	μs	$T_J = 25^\circ C$, $V_{DM} = \text{rated } V_{DRM}$, $I_{TM} = 50A$ DC, $t_p = 1\mu s$	
			Resistive load Gate pulse: 10V, 5Ω source	
T_q Max. turn-off time (*)	Min	Max	$T_J = T_{J\max}$, $I_{TM} = 30A$, commutating $di/dt = 20A/\mu s$, $V_R = 50V$	
	15	30		$t_p = 500\mu s$ dv/dt : see table in device code

C384 SERIES

Blocking

Parameter	C384PB	Unit s	Conditions
dv/dt Maximum critical rate of rise of off-state voltage	500	V/μs	T _J = T _J max. linear to 80% V _{DRM} , higher value available on request
I _{DRM} Max. peak reverse and off-state I _{RRM} leakage current	40	mA	T _J = T _J max, rated V _{DRM} /V _{RRM} applied

Triggering

Parameter	C384PB	Units	Conditions
P _{GM} Maximum peak gate power	60	W	T _J = T _J max, f = 50Hz, d% = 50
P _{G(AV)} Maximum average gate power	10		
I _{GM} Max. peak positive gate current	10	A	T _J = T _J max, t _p ≤ 5ms
+V _{GM} Maximum peak positive gate voltage	20	V	T _J = T _J max, t _p ≤ 5ms
-V _{GM} Maximum peak negative gate voltage	5.0		
I _{GT} DC gate current required to trigger	200	mA	T _J = 25°C, V _A = 12V, R _a = 6Ω
V _{GT} DC gate voltage required to trigger	3	V	
I _{GD} DC gate current not to trigger	20	mA	T _J = T _J max, rated V _{DRM} applied
V _{GD} DC gate voltage not to trigger	0.25	V	

Thermal and Mechanical Specification

Parameter	C384PB	Units	Conditions
T _J Max. operating temperature range	-40 to 125	°C	
T _{stg} Max. storage temperature range	-40 to 150		
R _{thJ-hs} Max. thermal resistance, junction to case	0.17 0.08	K/W	DC operation single side cooled DC operation double side cooled
R _{thC-hS} Max. thermal resistance, c case to heatsink	0.033 0.017		DC operation single side cooled DC operation double side cooled
T Mounting torque, ± 10%	4900	N	
wt Approximate weight	160	g	

C384 SERIES

Outline Table

